



CREATING A CLEANER, SAFER, HEALTHIER WORLD.

COATINGS



Eco-HPS[®] 100

6 G/L GLOSS URETHANE TOPCOAT

- **LEED[®]** – LEED green building certification program credits may be available:
 - Indoor Environmental Quality
 - 4.2 Low-Emitting Materials, Paint and Coatings
- **HIGH CHEMICAL RESISTANCE** – Proprietary two-component formula withstands harsh industrial traffic, Skydrol[®], jet fuels, and other chemicals
- **COST EFFECTIVE** – 100% aliphatic formula will not yellow from UV rays and may reduce lighting needs and cleaning costs



T7

Tennant Company is a world leader in indoor and outdoor environmental cleaning solutions and floor and wall coatings.

CHEMICAL RESISTANCE PROPERTIES

		1 day	7 day
Acids, Inorganic	10% Hydrochloric Acid	E	E
	30% Hydrochloric Acid (Muriatic)	E	E
	10% Nitric Acid	G	P
	50% Phosphoric Acid	G	G
	37% Sulfuric Acid (Battery Acid)	E	G
Acids, Organic	10% Acetic Acid	E	E
	10% Citric Acid	E	E
	Oleic Acid	E	E
Alkalies	10% Ammonium Hydroxide	E	E
	50% Sodium Hydroxide	E	E
Solvents (Alcohols)	Ethylene Glycol (Antifreeze)	E	E
	Isopropyl Alcohol	G	G
	Methanol	G	F
Solvents (Aliphatic)	d-Limonene	E	E
	Jet Fuel (JP-4)	E	E
	Gasoline	E	E
	Mineral Spirits	E	E
Solvents (Aromatic)	Xylene	E	E
Solvents (Chlorinated)	Methylene Chloride	P	P
Solvents (Ketones & Esters)	Methyl Ethyl Ketone (MEK)	F	F
	Propylene Glycol Methyl Ether Acetate (PMA)	E	G
Miscellaneous Chemicals	20% Ammonium Nitrate	E	E
	Brake Fluid	E	E
	Bleach	E	E
	Motor Oil (SAE30)	E	E
	Skydrol® 500B	E	E
	Skydrol® LD4	E	E
	20% Sodium Chloride	E	E
	1% Tide® Laundry Soap	E	E
	10% Trisodium Phosphate	E	E

Based on 1-day and 7-day spot testing on concrete. Coating cured 2 weeks prior to testing.

Registered trademarks: Tide® of Procter and Gamble, Skydrol® of Solutia, Inc.

E = Excellent (No Adverse Effect) F = Fair (Moderate Adverse Effect)
G = Good (Limited Adverse Effect) P = Poor (Unsatisfactory)

PHYSICAL/ PERFORMANCE PROPERTIES

MATERIAL PROPERTIES (LIQUID)	TEST METHOD	RESULTS
Volatile Organic Compound (VOC) lb/gal (g/L)	ASTM D3960	Mixed A+B: 0.05 (6)
Flash Point, °F (°C)	ASTM D3278	Part A: >200 (93) Part B: >200 (93)
Seta Closed Cup		Part A: 99.35 Part B: 59.23 A+B = 91.3
Percent Solids, by weight	ASTM D2369	Part A: 99.35 Part B: 59.23 A+B = 91.3
Density, lb/gal (kg/L)	ASTM D1475	Part A: 9.56 (1.15) Part B: 9.54 (1.15) A+B = 9.55 (1.15)
Shelf Life		2 years from date of manufacturer
Viscosity, cps Brookfield	ASTM D2196	A+B = 400-500

CURED COATING PROPERTIES (DRY FILM)

Abrasion Resistance, mg loss* Taber Abraser	ASTM D4060	18.8
Coefficient of Friction (COF)** James Friction Tester	ASTM D2047	0.61
Dry Film Thickness, mils (microns)		2.9 (73.7) (1 coat)
Tensile Strength, psi (MPa)	ASTM D2370	6,250 (43.09)
Percent Elongation (resin only)	ASTM D2370	6
König Hardness (3 mil/0.08 mm) (resin only)	ASTM D4366	171.3

*CS-17 Taber Abrasion Wheel, 1,000 gram load, 1,000 revolutions.

**To improve traction in slip hazard areas, use Tennant 291 Grit. See 291 Grit Product Bulletin for more information.

APPLICATION CHARACTERISTICS


Coverage Rate, ft ² /gal (m ² /L)	500 (12.3)
Application Thickness, wet mils (mm)	3.2 (81) (1 coat)

Testing performed at ambient conditions unless stated otherwise.

Specifications subject to change without notice.

COLORANTS

These colors are close approximations; please contact Tennant for product samples. Custom colors are also available. See product bulletin for any restrictions on colorant use.

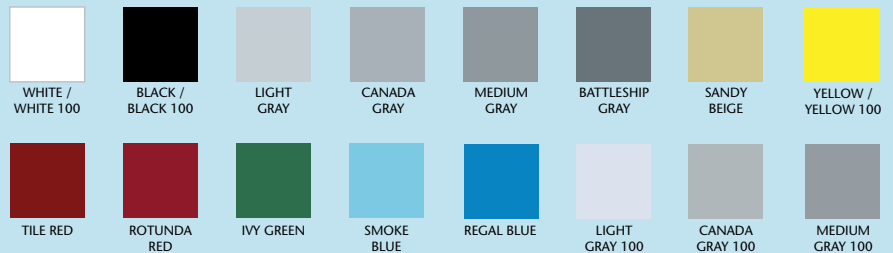

FOR FIRST IMPRESSIONS THAT LAST™

For additional information, call +1.800.553.8033

or email info@tennantco.com

Tennant
701 North Lilac Drive
Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033
Quebec: +1.800.361.9050
Overseas: +1.763.540.1315

2.030.001.am.en Eco-HPS™100 3/13

©2013 The Tennant Company logo and other trademarks designated with the symbol "®" are trademarks of Tennant Company registered in the United States and/or other countries. Tennant Company's products are sold and serviced through subsidiaries of Tennant Company and distributors.

www.tennantco.com
info@tennantco.com